


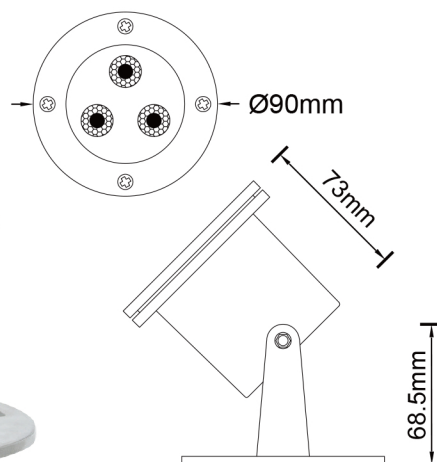

General Data	
Item No.	SL-3001RGBW-A
Power	12 Watts
LED type	3 PCS 4W 4in1 RGBW Epistar SMD LEDs
Luminous flux	450~500 lm (All LEDs on)
CCT	RGB+WW3000K or RGB+CW6000K
CRI	70+
Beam angle	25°, 45°, 60°
Dimension	90 x 73 (mm) Diameter x Length
Cut out	/
Net weight	1.12 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 5x0.75mm square
Driver	Low voltage constant current output ,excluding the transformer


Construction Data	
IP rating	IP68 Waterproof
IK rating	IK06
Housing	Stainless steel 304
Protection finishing	/
Trim	Stainless steel 304
Glass	Tempered Glass.T=4.6mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP68 ,glue
Gasket	O-ring PMQ silicone seal
Accessories	
Bracket	Stainless steel 304 bracket
Packaging	
Inner box size	110*110*135 mm
Carton size	57.5*24*16 cm (10PCS / carton)

3 Years Warranty


UNDERWATER LIGHTS SERIES

Photometric Data (All LEDs on, 25°) & Illumination Picture

Light Distribution Curve [Unit: cd]

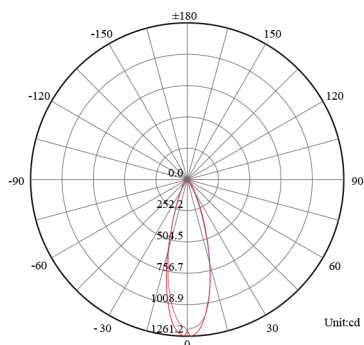

Lux distance Curve

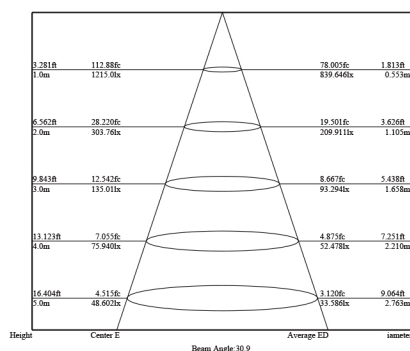

Illumination Picture



IP68 IK06